

LAN CABLE

FTP CAT 5e

CM-013-CPR

CPR CERTIFIED

CONSTRUCTION PRODUCTS REGULATION

CPR Regulation (EU) n° 305/2011

Jacket
PVC


Core
COPPER

Category
5e

Type
FTP

Conductor
28 AWG

Length
305m

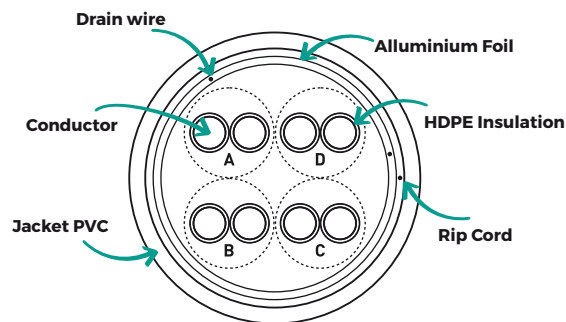

Conductor

Configuration	4 x 2 x 0.45mm±0.01
Material	Copper
Work Datapass	150m

Insulation

Material	HDPE
PE OD	∅ 0.91±0.02mm

Shielding

Foil	Mylar+Alumium
Rid Cord	Nylon
Drain wire	0.4CCA

Jacket

Material	PVC
Color	Gray
PVC OD	5.1mm±0.2mm
PVC Thickness	0.55±0.02mm

Performance

Conductor Resistance Ω / 305m. 20 °C	≤33 Ω
Conductor Allow Load Current(A)	0.5A
Voltage Rating(V)	≤30V
Operating Temperature (°C)	-25°C + 75°C